


AutoFill®

The ultimate tyre inflation workstation



Look no hands

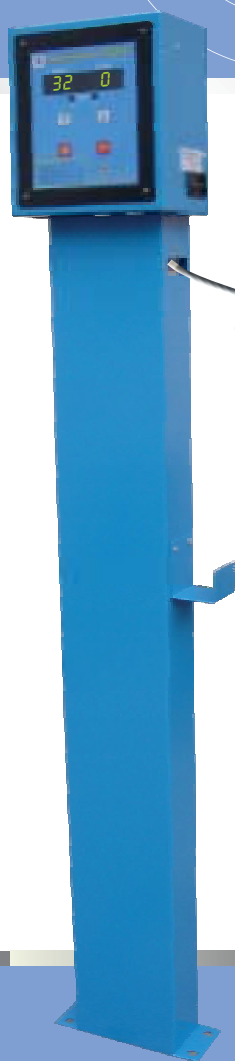

CE

JIA Sources
International Ltd.

The AutoFill 150/200 designed for all types of tyres.



AutoFill 150/200

A Robust, compact, easy to operate intelligent tyre inflator.
For peace of mind, accurate, reliable tyre pressures.

- Two Large LED displays, preset pressure, actual pressure.
- Self-calibrating fault diagnostics every time you switch on.
- Sleep mode when not being used.
- Reads in both PSI and Bar.
- Auto stops with an audible sound when the procedure is completed or if a problem occurs.
- Bead seating function, allows the tyre to be over inflated and then deflated to the pre-set pressure fully automatically.
- The N2 option purges the tyre of Oxygen in preparation for filling with Nitrogen.
- Auto inflates, for multiple tyre inflation.
- 9m high grade canvas air hose with air chuck.

Model	AF150	AF200
Operating Temperature	-10°C ~ +50°C	
Supply Voltage	100-240V,50/60Hz,45W	
Display	8 digit LED	
Operating Principle	Microprocessor Digital Control	
Max. Inlet Air Supply	170 Psi (12 Bar)	230 Psi (16 Bar)
Min. Inlet Air Supply	5 Psi (0.3 Bar)	
Operating Pressure Range	3 ~ 150 Psi (0.2 ~ 10.5 Bar)	3 ~ 200 Psi (0.2 ~ 14 Bar)
Precision	1 Psi	
Units of Measurement	Psi, Bar	
Bead Seating	0-100% Over-inflation of Target Pressure	
N2 function	1-5 variable purge cycles with variable deflation threshold (15% to 30%)	
Automatic inflation	Skip pressing START button for multiple tyre inflation. Variable pre-sets.	
Dimensions	200mm x 120mm x 220mm	
Gross Weight	3.2 kg	
Optional accessories	High quality Stand with air hose supporting bracket	

Please contact our distributor:

