

Pnumatic Tools


Impact Wrench



The professional's choice ...

SK[®]
Auto Tools

ViaTools[®]

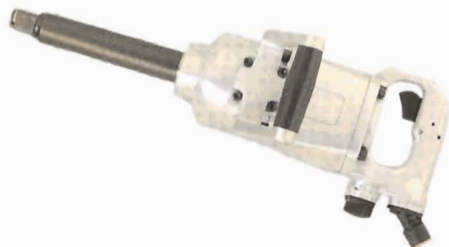

JIASOURCES
INTERNATIONAL LTD





SK1033



SK1077



SK1077XP



SK231 & 231N



SK2135Ti



SK9136 & 9136-6



SK4000-9



SK4000-6



outside & inside trigger
available for SK-4000 series

Model	Capacity		Standard Bolt size		Max. Torque		Air Pressure		Hose Size (ID)		Air Consumption	Air Inlet	Free speed	Overall Length		Weight (about)
	Inch		Inch	MM	FT/LBS	NM	PSI		inch	MM	CFM	PT/NPT	RPM	Inch	MM	Kgs
SK-1033	3/8		3/8	10	30	40	90		5/16	8	3.00	1/4	240	6.50	165	0.52
SK-1077XP	1/2		3/8	10	60	81	90		5/16	8	4.00	1/4	200	10.30	260	1.13
SK-1077	1/2		3/8	10	50	68	90		5/16	8	2.50	1/4	160	10.00	254	1.20
SK-231	1/2		9/16	14	450	578	90		3/8	10	4.20	1/4	7000	6.75	172	2.60
SK-231N	1/2		9/16	14	450	578	90		3/8	10	4.20	1/4	7000	8.75	223	2.70
SK-2135Ti	1/2		9/16	14	700	930	90		3/8	10	4.20	1/4	9000	7.50	191	1.90
SK-9136	3/4		1-1/8	28	950	1288	90		1/2	12.5	8.00	1/4	7250	9.00	230	3.80
SK-9136-6	3/4		1-1/8	28	950	1288	90		1/2	12.5	8.00	1/4	7250	15.00	383	4.50
SK-4000-6	1		1-37/64	40	1800	2448	90		1/2	12.5	10.00	1/2	5000	20.10	510	11.50
SK-4000-9	1		1-37/64	40	2000	2720	90		1/2	12.5	10.00	1/2	5000	22.50	570	13.00



SK106 Stripping tool



SK1062 Die Grinder



SK1063 Low speed tyre buffer

Item No.	SK106	SK-1062	SK1063
Free Speed	4000 RPM	4000 RPM	4000 RPM
Collect size	5/8" 24T	6 mm (1/4")	N/A
Air Pressure	90 psi	90 psi	90 psi
Air Consumption	300 L/min	300 L/min	300 L/min
Air Inlet	1/4"	1/4"	1/4"
Exhaust system	Rear	Rear	Rear
Net Weight	0.86 KGS	0.75 kgs	0.75 kgs
Overall Length	225 mm	220 mm	220 mm



HR040810 HOSE REEL
8mmx12mmx10M
PU braided hose
W/ 1/4" Male brass fitting & Spring
Working pressure: 15BAR~20BAR