

Foot operated workshop presses 16 - 25 tons

Accessories

61240




Shelves for storing.
(Excl. accessories
shown on picture)




	Model	Max (Ton)	(mm/ stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
①	FP 16	16	6,0/2,0	1200	550	140	150	65	40	1780	850	600	95
②	FP 20	20	9,0/3,0	915	600	140	240	90	50	1850	880	520	145
③	HP 20	20	9,0/3,0	915	600	140	240	90	50	1850	880	520	144
④	FP 25	25	9,0/3,0	915	600	140	240	90	50	1850	880	520	148
⑤	HP 25	25	9,0/3,0	915	600	140	240	90	50	1850	880	520	147

Hand operated workshop presses 20 - 25 tons

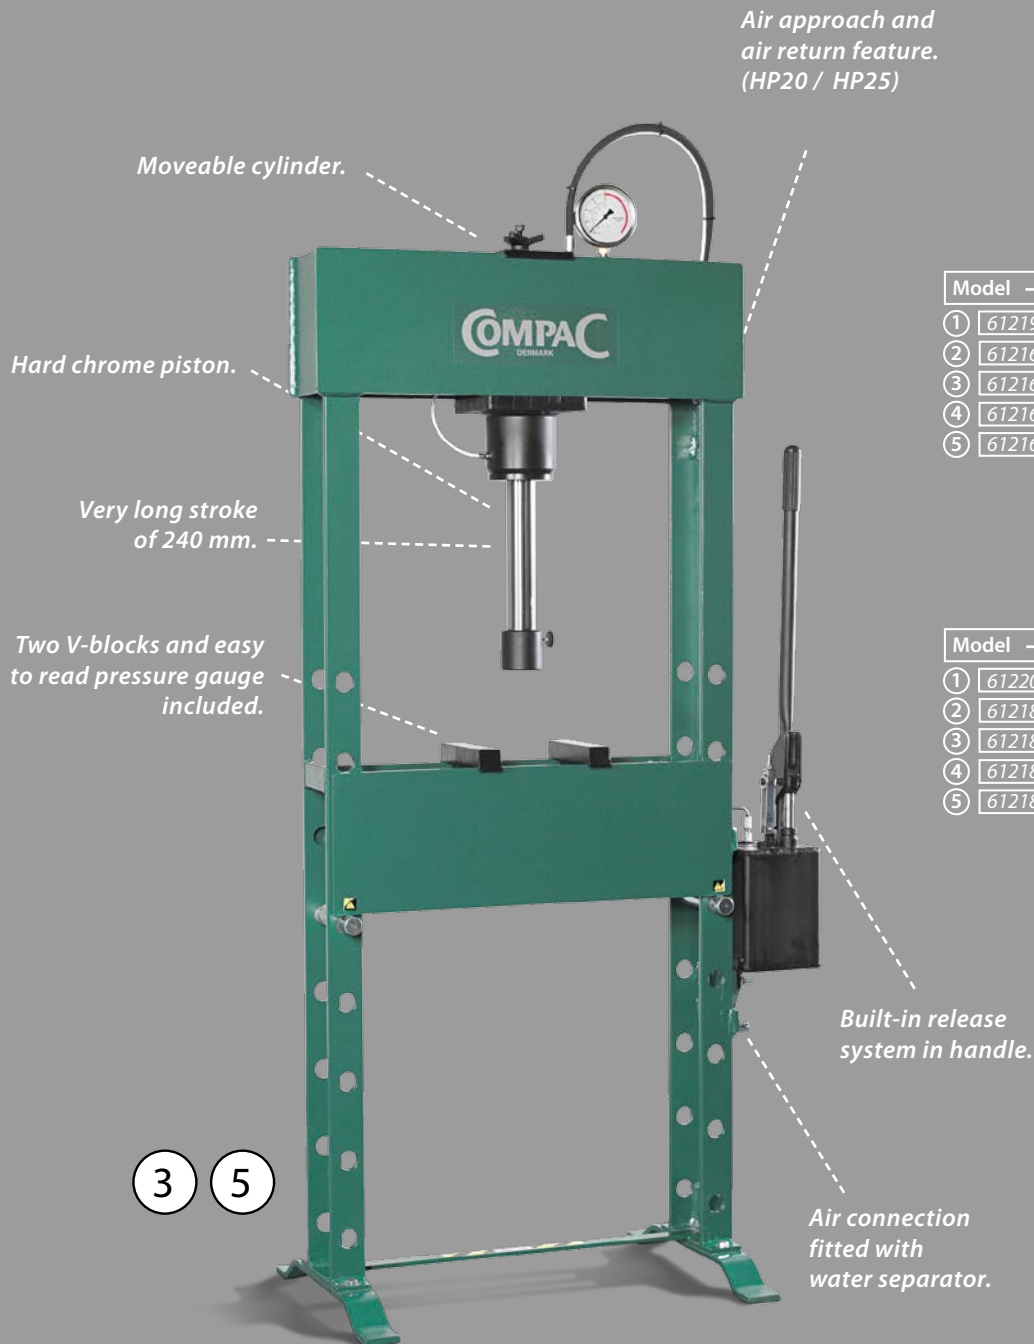

Accessories

61100



Press plate.

Model --

- | | |
|---|-------|
| ① | 61219 |
| ② | 61216 |
| ③ | 61216 |
| ④ | 61216 |
| ⑤ | 61216 |



Press punches.
(7 pieces, Ø12, 14, 16, 20, 22, 25, 30)

Model --

- | | |
|---|-------|
| ① | 61220 |
| ② | 61218 |
| ③ | 61218 |
| ④ | 61218 |
| ⑤ | 61218 |




Bearing removal kit.
(4 pieces, Ø64, 67, 72, 75)

52010



Winch.
(Factory mounted)
Available for
FP20/HP20/FP25/HP25

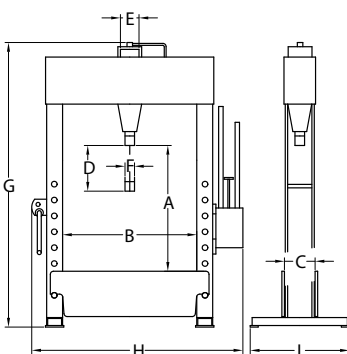

Accessory:
Shelves for
storing.
(Nr. 61240)



Moveable
cylinder.



Foot operated workshop presses 40 - 50 tons



Accessories

61240



Shelves for storing.
(Excl. accessories shown on picture)



FP 40
FP 50

Foot operated for hands-free operation under load and return.




Fast and safe adjustment of the press table height.

7 9

	Model	Max (Ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
⑥	HP 40	40	6,7/0,7	840	840	200	300	125	60	1830	1350	620	315
⑦	FP 40	40	6,7/0,7	840	840	200	300	125	60	1830	1350	620	323
⑧	HP 50	50	6,7/0,7	840	840	200	300	125	60	1830	1350	620	315
⑨	FP 50	50	6,7/0,7	840	840	200	300	125	60	1830	1350	620	323
⑩	HP 60	60	3,8/0,4	850	1000	255	300	160	80	1980	1540	680	620
⑪	HP 70	70	3,8/0,4	850	1000	255	300	160	80	1980	1540	680	620
⑫	HP 100	100	3,4/0,3	900	1025	300	320	220	100	2150	1620	860	910


(Air operated height adjustment of press table on HP100 with chain attached to piston.)

Hand operated workshop presses 40 - 100 tons

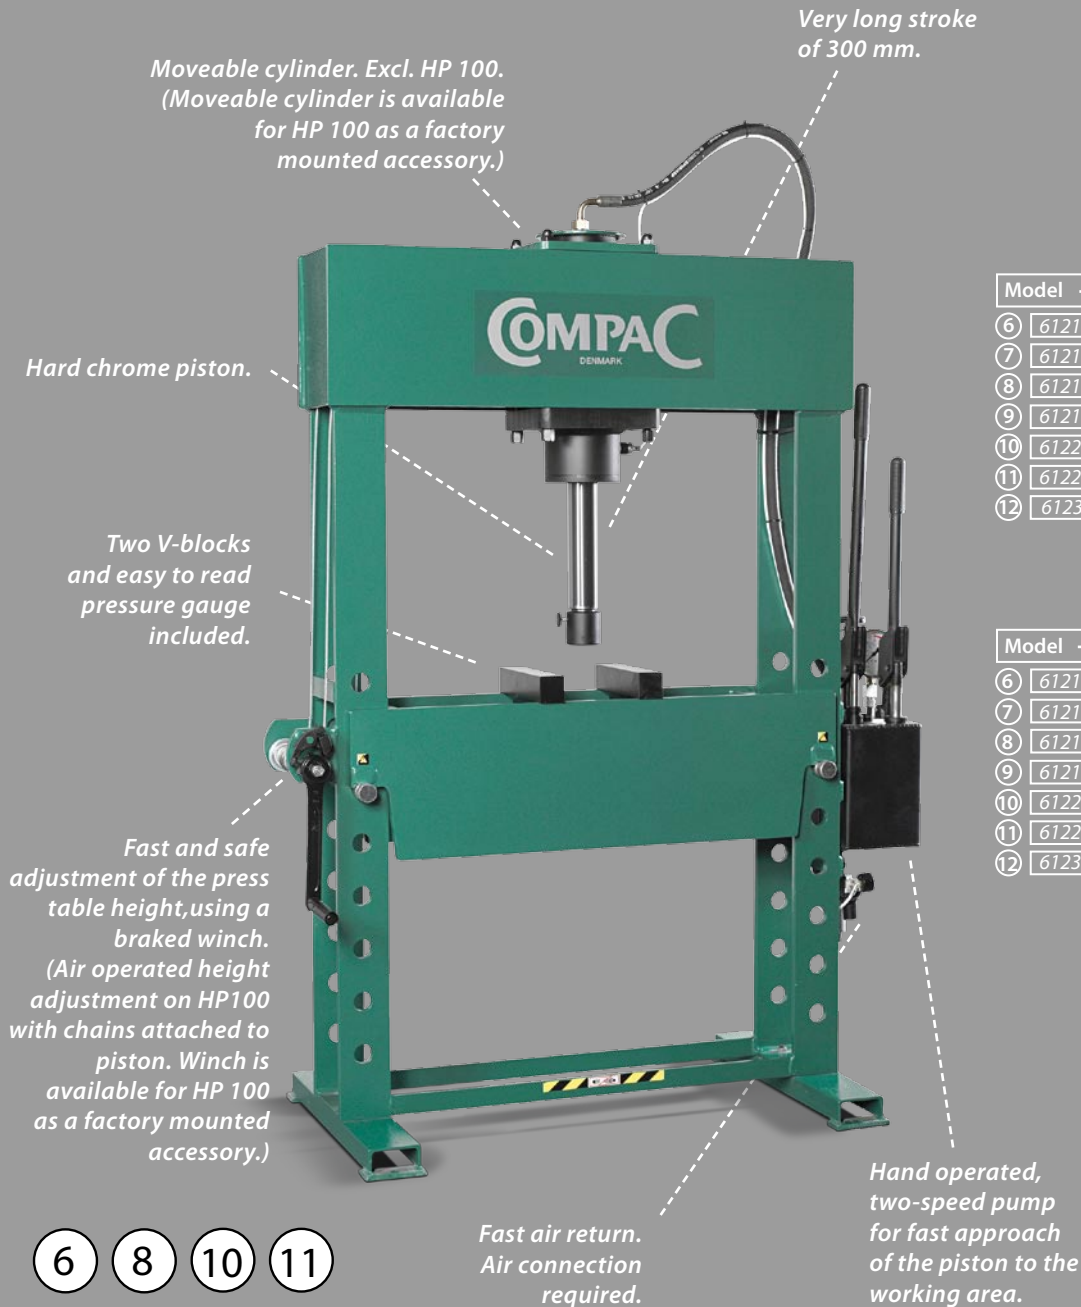

Accessories

61100



Press plate.

Model --

- | | |
|----|-------|
| 6 | 61216 |
| 7 | 61216 |
| 8 | 61216 |
| 9 | 61216 |
| 10 | 61228 |
| 11 | 61228 |
| 12 | 61231 |



Press punches.
(7 pieces, Ø12, 14, 16, 20, 22, 25, 30)

Model --

- | | |
|----|-------|
| 6 | 61218 |
| 7 | 61218 |
| 8 | 61218 |
| 9 | 61218 |
| 10 | 61229 |
| 11 | 61229 |
| 12 | 61232 |




Bearing removal kit.
(4 pieces, Ø64, 67, 72, 75)

52012



Winch for HP 100.
(Factory mounted)

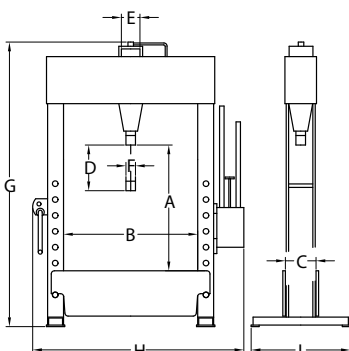

Fast and safe adjustment of the press table height. (6 - 11)

Winch is available for HP 100 as a factory mounted accessory.



Moveable cylinder. (6 - 11)

Moveable cylinder is available for HP 100 as a factory mounted accessory.



Electro-hydraulic workshop presses with single acting cylinder 40 - 60 ton

Single acting cylinder: One-way pressing action for where heavy tooling is not to be mounted on the piston.




	Model	Max (Ton)	(mm/ sek)	(Pull/ ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
13	EP 40	40	9,0	-	840	840	200	300	125	60	1830	1450	620	345	2,2
14	EP 60	60	10,0/5,0	-	850	1000	255	300	160	80	1980	1760	680	670	2,2
15	EP 40 D	40	9,0	6	810	840	200	300	125	60	1940	1450	620	355	2,2
16	EP 60 D	60	10,0/5,0	6	820	1000	255	300	160	80	1980	1640	680	717	2,2
17	EP 100 D	100	10,0/1,4	4	900	1025	300	320	220	100	2150	1620	860	910	2,2

EP 40 D = Electro hydraulic Press.

EP 40 D = Capacity 40 tons.

EP 40 D = Double acting cylinder.

Electro-hydraulic workshop presses with double acting cylinder 40 - 100 ton

 **Double acting cylinder:**
Featuring both pressing and pulling facilities.

