

Wheel lifter for aluminium wheels with low profile tyres up to 24"

Compac's wheel lifter is an ergonomic solution for easy and safe demounting, handling and mounting of aluminium wheels with low profile tyres up to 24".
Capacity: Wheels up to 60 kg. (Outside diameter max. 820 mm.)



Utility model protected.
(Schutzanspruch)

WD 60



"Roll on – Roll off". No lifting required. Wheel rolls easily over low legs.

Know-how is the difference

Standard



Reversible transmission adaptor with saddle and rubber pad.



Reversible transmission adaptor improves access when used for jobs other than transmissions.



Large transmission adapter. Practical fixing points.

Accessories

53004




Oil drain pan (18,9 litre) with adaptor for securing load. Ideal for fast and easy oil changes.



Effortless foot operated lifting.



Rollers with ball bearings for easy rotation and positioning.



Easy access to wheel bolts. The wheel is positioned away from the main piston.



Wheel dollies for trucks and buses

Ideal for service trucks.
Easy and safe mounting, demounting
and handling of heavy wheels for
trucks and buses.



*Ergonomical handle makes
the wheel dolly easily
controllable by just
one mechanic.*

WD Mobile

Capacity 250 kg.

*Rollers with ball bearings for
easy rotation and positioning
of wheels onto hubs.*

15 kg.



Capable of handling
wheels up to
large 445/65 - 22,5".



The rollers have three
positions each side for
different wheels sizes.



Spring loaded support for
fast and easy storing.

Extra support wheels for
easy and safe manoeuvring
even when fully loaded.



Wheel dollies for trucks and buses

Ideal for handling large, heavy wheels on trucks, buses and vans.



WD 800

Capacity 800 kg.

Dual rollers fitted with bearings for separate rotation and positioning of wheels.


136 kg.



Sliding arms.
Enables handling of wheels with diameter from Ø 545 mm - 1278 mm.



Position of cylinder
provides clear access to operating area through the open frame.

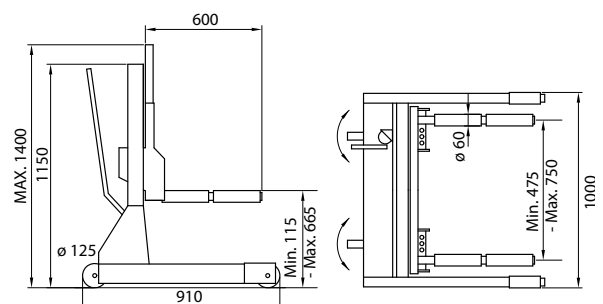

Wheel dolly for agricultural and earth moving machinery

Easy and safe mounting, demounting and handling of large wheels on agricultural and earth moving machinery.



Capable of handling large wheels from 1150 mm up to 2150 mm in diameter and up to 1050 mm in depth.

Top-point wheel connection rod keeps the wheel in safe balance.



Double acting hydraulic system.
Hands-free switch between lifting and lowering action.
Safe and controlled lowering.



2 x 4 large rollers improve handling of tyres with deep treads.

WD 1500

Capacity 1.500 kg.

156 kg.

Large Ø150 mm wheels for easy manoeuvrability.



Mobile: Easy to use outside the workshop.
Disassembled in a few seconds.

